


Protector térmico – THERMOSTAT

B1009X-Series

额定 动作温度 Rated Functioning Tf(°C)	恢复温度 Reset Temp. Ton(C)	额定电压 Voltage Ac (V)	额定电流 Current (A)	安全认证 SAFETY APPROVALS
				CQC
60 ± 5	40 ± 10	250	5	
70 ± 5	50 ± 10	250	5	●
80 ± 5	55 ± 10	250	5	●
85 ± 5	60 ± 10	250	5	●
90 ± 5	65 ± 10	250	5	●
95 ± 5	70 ± 10	250	5	●
100 ± 5	75 ± 10	250	5	●
105 ± 5	80 ± 10	250	5	●
110 ± 5	80 ± 10	250	5	●
115 ± 5	80 ± 10	250	5	●
120 ± 5	80 ± 10	250	5	●
125 ± 5	80 ± 10	250	5	●
130 ± 5	90 ± 15	250	5	●
135 ± 5	90 ± 15	250	5	●
140 ± 5	90 ± 15	250	5	●
145 ± 5	90 ± 15	250	5	●
150 ± 5	90 ± 15	250	5	

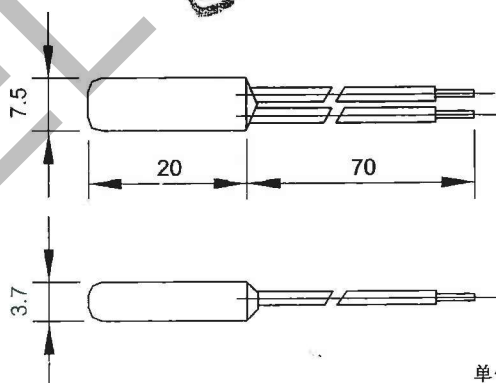

单位 Unit:mm

APPLICATION FOR:

Fan motor, Transformer, Fluorescence Lamp Ballast,
Battery, Induction Cooker, Motor, etc.