


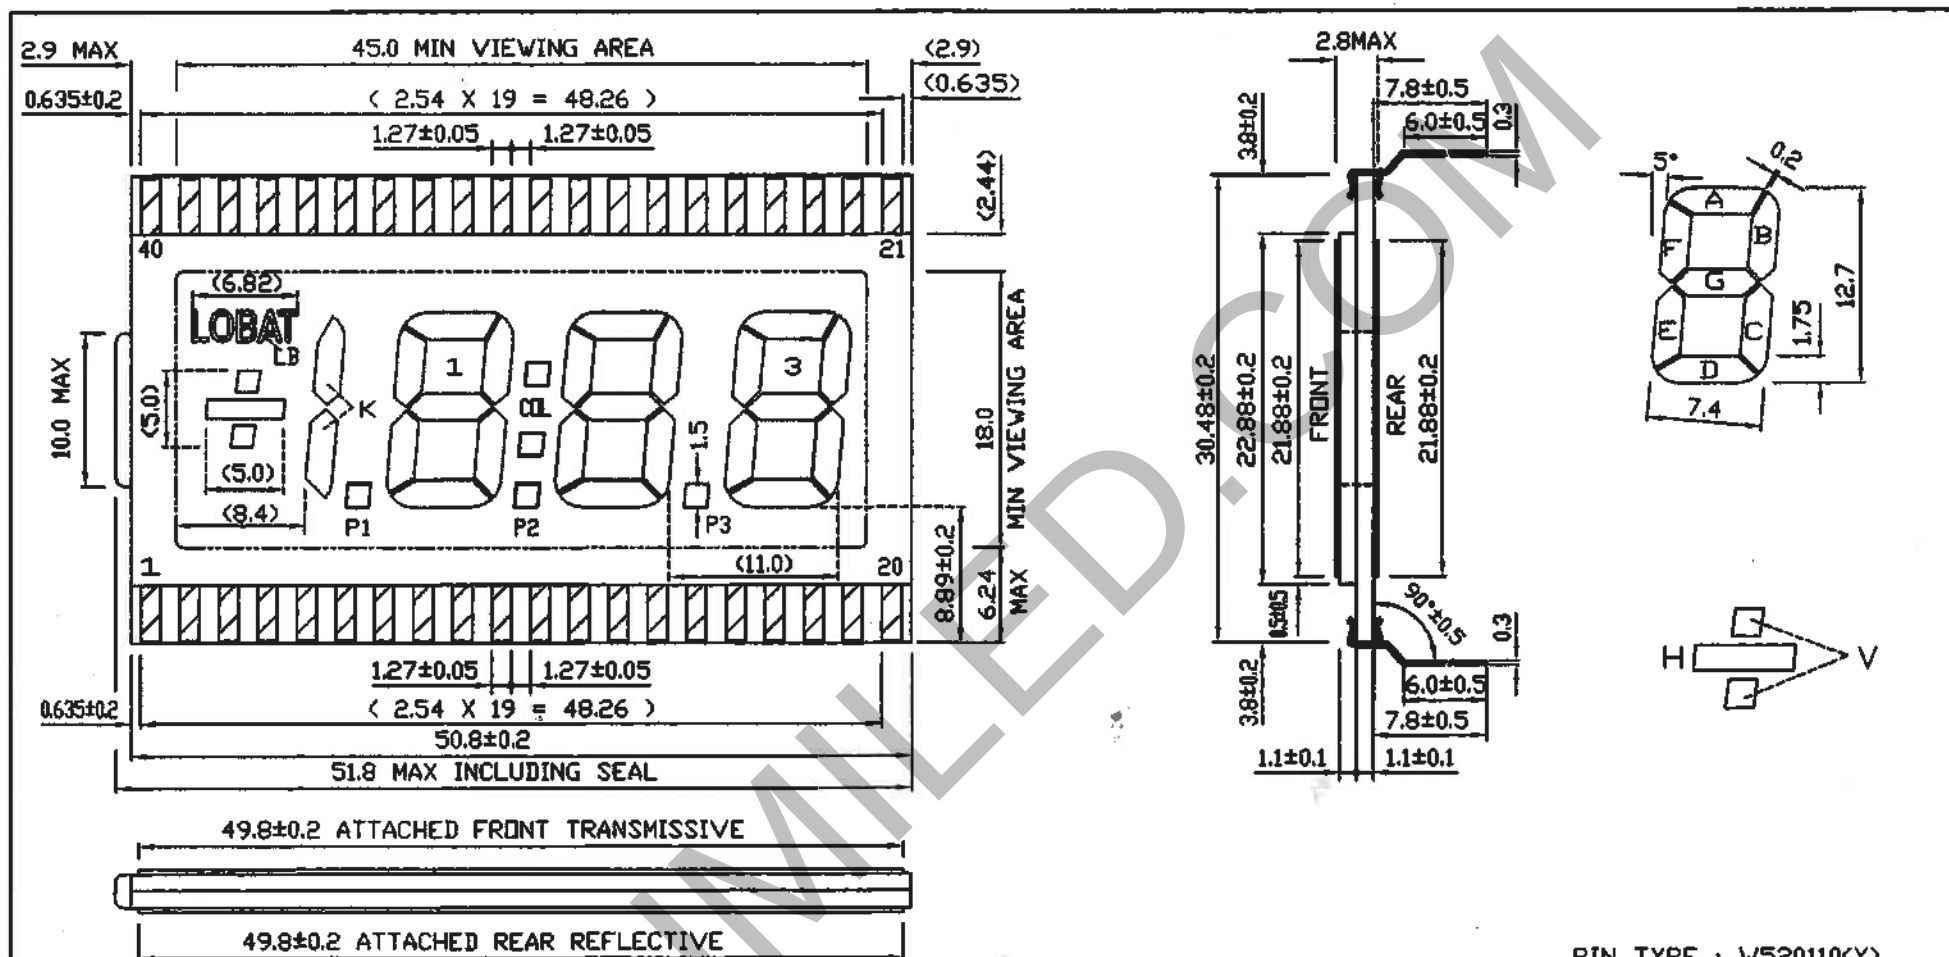

PIN TYPE : W520110(Y)

PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40
COM	COM	H	K	--	--	--	--	P1	1E	1D	1C	P2	2E	2D	2C	P3	3E	3D	3C	3B	3A	3F	3G	2B	2A	2F	2G	COL	1B	1A	1F	1G	--	--	--	--	--	LB	V	COM

		DISPLAY TYPE: TN	DISPLAY MODE: POSITIVE	1	DUTY CYCLE	CASIL SEMICONDUCTOR LTD.	
		LCD NO.:		1	BIASING	PRODUCT NO. CSL-84354	REV. A
		OPERATING TEMP: -10°C ~ + 60°C		5.0V	OPERATING VOLTAGE	POLARIZING CODE: RM	UNITS: MM
		STORAGE TEMP: -20°C ~ + 70°C		6	O'CLOCK	GENERAL TOL ± 0.2MM	DWN HWQ 06.10.6
		OPERATING HUMIDITY: ≤ 60%RH				CHKD HWZ 06.10.6	APPD HSY 06.10.10
		STORAGE HUMIDITY: ≤ 70%RH					
REV.	DATE	MODIFICATION					