
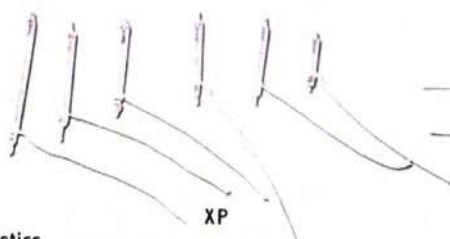


Lámparas Xenón – STROBOSCOPIC TUBE

LXE-XP3645

闪光管 频闪管
Flash Tubes Stroboscopic Tubes



Electrical characteristics

TYPE	Cathode-Anode voltage V			Rated Input Energy w	Flash Interval Time s	Trigger Voltage kv	Flash Times 次	Dimensions mm		
	Rated	Max	Min					L	l	d
XP3216	330	350	200	1	15/0.3	≥ 5	≥ 1 × 10 ⁴	21	16	3.2
XP3218	330	350	200	1	15/0.3	≥ 5	≥ 1 × 10 ⁴	23	18	3.2
XP3220	330	350	200	1	15/0.3	≥ 5	≥ 1 × 10 ⁴	25	20	3.2
XP3222	330	350	200	1	15/0.3	≥ 5	≥ 1 × 10 ⁴	27	22	3.2
XP3225	330	350	200	1	15/0.3	≥ 5	≥ 1 × 10 ⁴	30	25	3.2
XP3228	330	350	200	1	15/0.3	≥ 5	≥ 1 × 10 ⁴	32	28	3.2
XP3230	330	350	210	1	15/0.3	≥ 5	≥ 1 × 10 ⁴	35	30	3.2
XP3235	330	360	220	1	15/0.3	≥ 5	≥ 1 × 10 ⁴	40	35	3.2
XP3240	330	360	220	2	15/0.3	≥ 5	≥ 1 × 10 ⁴	46	40	3.2
XP3245	330	360	230	2	15/0.3	≥ 5	≥ 1 × 10 ⁴	51	45	3.2
XP3250	330	360	230	2	15/0.3	≥ 5	≥ 1 × 10 ⁴	56	50	3.2
XP3256	330	360	230	3	15/0.3	≥ 5	≥ 1 × 10 ⁴	62	56	3.2
XP3260	330	360	230	3	15/0.3	≥ 5	≥ 1 × 10 ⁴	66	60	3.2
XP3645	330	360	230	3	15/0.3	≥ 5	≥ 1 × 10 ⁴	51	45	3.6
XP3650	330	360	230	3	15/0.3	≥ 5	≥ 1 × 10 ⁴	56	50	3.6
XP3656	330	360	230	3	15/0.3	≥ 5	≥ 1 × 10 ⁴	62	56	3.6
XP3660	330	360	230	3	15/0.3	≥ 5	≥ 1 × 10 ⁴	66	60	3.6
XP4045	330	360	230	3	15/0.3	≥ 5	≥ 1 × 10 ⁴	51	45	4.0
XP4050	330	360	230	3	15/0.3	≥ 5	≥ 1 × 10 ⁴	56	50	4.0
XP4055	330	360	230	3	15/0.3	≥ 5	≥ 1 × 10 ⁴	61	55	4.0
XP4060	330	360	230	3	15/0.3	≥ 5	≥ 1 × 10 ⁴	66	60	4.0
XPH80100	300	350	200	200J	15	≥ 5	≥ 5 × 10 ¹	160	100	8.0
XPH10120	350	400	250	200J	15	≥ 5	≥ 5 × 10 ¹	190	120	10.0
XPH10160	350	400	250	200J	15	≥ 5	≥ 5 × 10 ¹	220	160	10.0
XPH13170	350	400	250	200J	15	≥ 5	≥ 5 × 10 ¹	230	170	13.0