
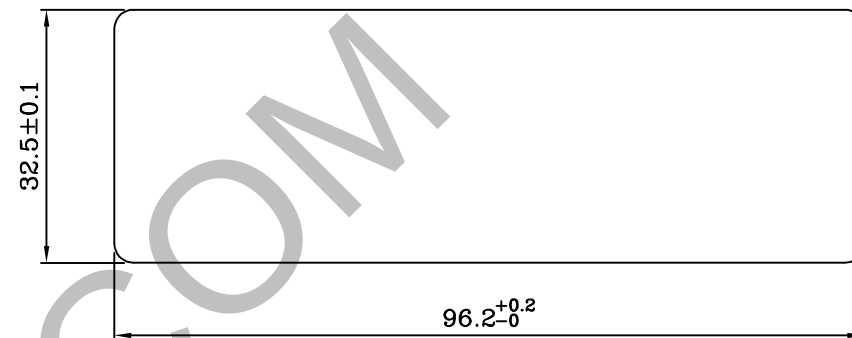
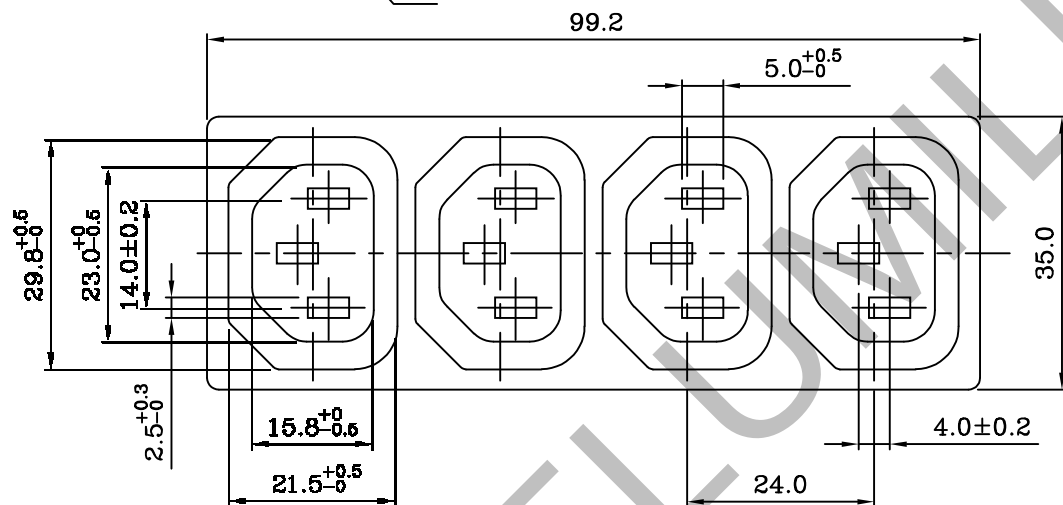
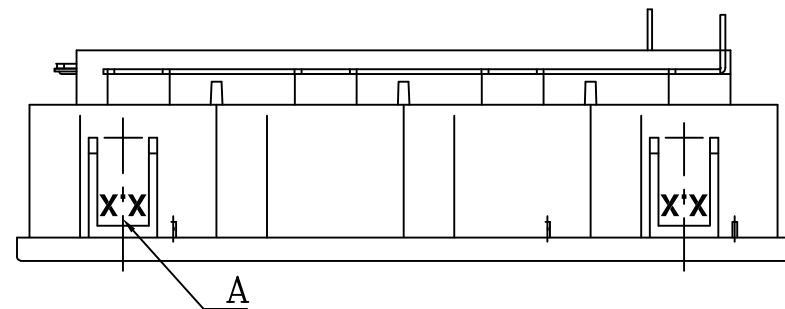


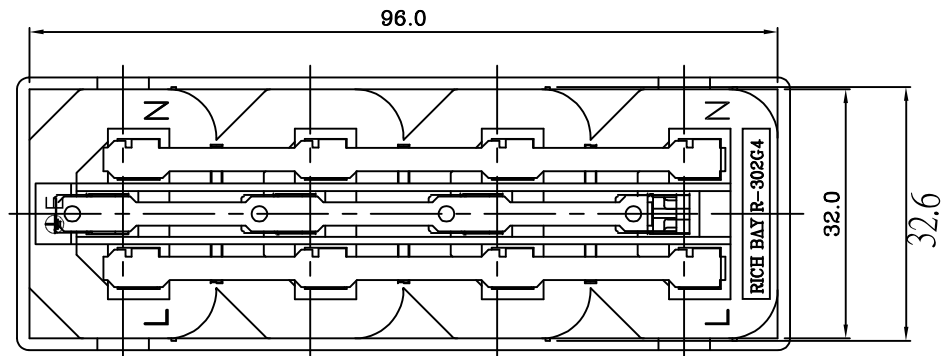



PANEL CUT-OUT

XX	A
10	1.0
12	1.2
15	1.5
17	1.7
20	2.0
25	2.5


SPECIFICATION:

1. Insulation Resistance: Over 100MΩ at 500V DC.
2. Dielectric strength: 2000V AC 1 Minute.
3. Body Material: Thermoplastic 94V-2~V-0.
4. Withdrawing force : 10N~50N.

Rating:AC 10A 250V	
Mark	
	VDE
	ENEC
	CCC
Rating:AC 15A 250V	
Mark	Safety Regulation
	CULUS

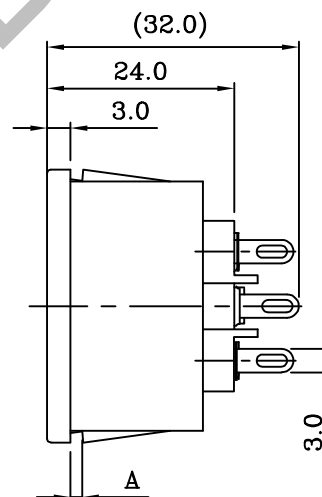


DRAWN BY



UNIT QTY
1

APPROVED BY



TOLERANCE
X.XX±0.1
XX.XX±0.2
XXX.XX±0.3

ID NO
DESCRIPTION

100421A04

PRODUCT NO.
INTERIM NO.
NEW NO.

PC243SA

REV
C