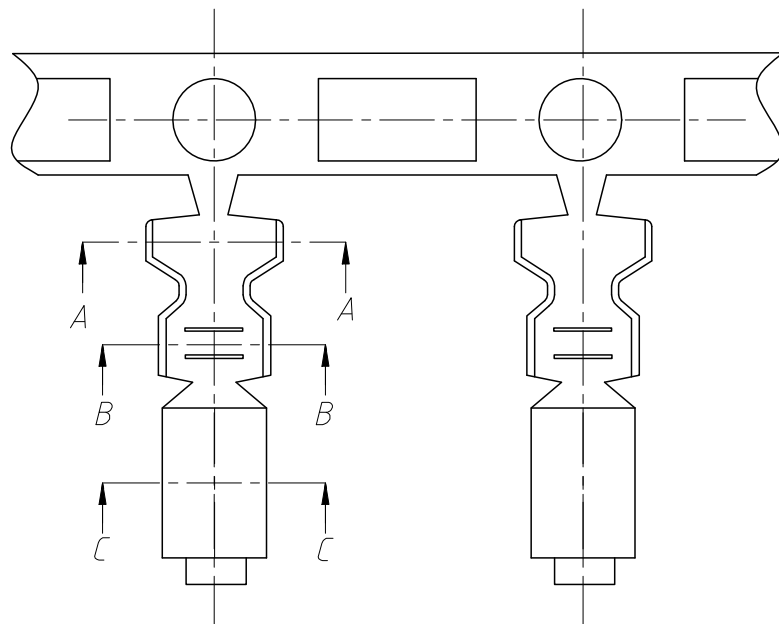
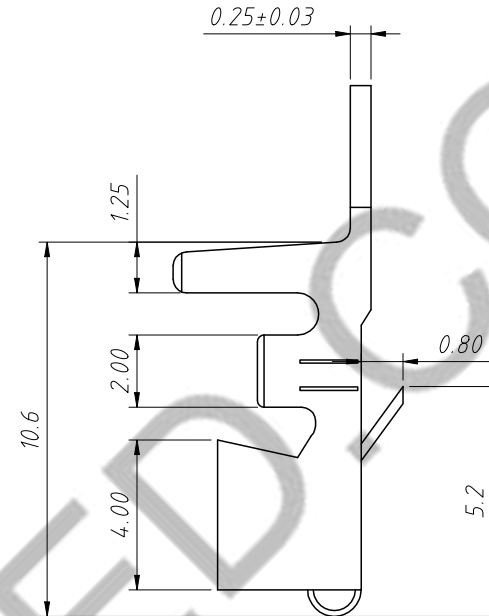


 0.25 ± 0.03 **Material:**

Terminal: Brass or Phosphor Bronze

Plating: Tin plated over Nickel

Applicable wires: AWG #22 ~ #18

Insulation O.D: 2.8mm

Qty/reel: 3000 pcs


Electrical Characteristics:

Rated Current: 7.0AMP


Voltage rating: 250V AC, DC

Temperature range: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$ Insulator Resistance: 1000M Ω Min


Withstanding Voltage: 1500V AC/minute

Contact Resistance: 20m Ω Max

A-A



B-B



C-C

Order Information:

PHU396A-TL

RoHS

Pitch: 3.96mm

Type:

H-Hosing

Terminal

S-Straight male pin

R-Right angle male pin

VM-Vertical SMT Pin

RM-Horizontal SMT Pin

ANGLE TOLERANCE		PROJECTION		Description:	
±3°				3.96mm VH Type Wire To Board Connector	
GENERAL TOLERANCE		UNITS	mm		
x.x	±0.30	SHEET SIZE	A4	PHU396A-TL	
x.xx	±0.20	Draw:	Daniel 2021-01-11		
x.xxx	±0.10	Check:	Daniel 2021-01-11		